

**SINGLE USE GLOVE, 100% NITRILE, POWDER FREE, 240MM LONG, 0.12MM THICK**

Premium performance, powder-free, nitrile single use glove. Dual certified (Industrial and Medical), extremely strong and higher chemical and puncture resistance than regular nitrile disposables.

**FEATURES**

- › 100% premium quality nitrile
- › Palm thickness 0.12mm (5 mil)
- › High resistance to penetration and projections of many chemicals
- › Chlorinated inside to offer more comfort and reduce friction when donning
- › Powder-free, latex free, non-sterile, AQL 1.5
- › Approved for food handling
- › Dual labelling: PPE and medical
- › Medical device compliant (MDD 93/42/EEC), conforms to EN455 (all parts)
- › Antistatic properties due to inherent antistatic properties of nitrile



**SUITABLE FOR**


**Typical Industries**

- Chemicals
- Electronics
- Food
- Manufacturing
- Oil and Gas
- Pharmaceutical
- Repair and Finishing

**Suitable Applications**

- Chemical Handling
- Food Preparation
- Handling Oily Components
- Laboratory Analysis
- Light Assembly
- Paint Spraying

**CERTIFICATION**

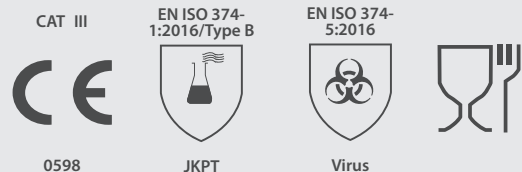

See overleaf for explanation

**PRODUCT INFORMATION**

<b>MATERIALS</b>	LINER:	Nitrile
	COATING:	N/A
<b>COLOUR</b>	Green	
<b>LENGTH (mm)</b>	240 mm	
<b>CUFF STYLE</b>	Beaded	

**ORDERING DETAILS**

SIZE	CODE	PACKAGING	VEND COMPATIBLE OPTION	
			CODE	PACKAGING
5½-6/XS	SKYTEAL0	100 singles per box	SKYVTEAL1	20 singles per box
6½-7/S	SKYTEAL1		SKYVTEAL2	
7½-8/M	SKYTEAL2	10 boxes per case	SKYVTEAL3	50 boxes per case
8½-9/L	SKYTEAL3		SKYVTEAL4	
9½-10/XL	SKYTEAL4			
10½ - 11/XXL	SKYTEAL5			

**RECOMMENDATIONS FOR USE**

- **USE:** Single use glove. Not suitable for thermal, electrical, heavy chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

**CERTIFICATION LEGENDS**



**RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016**

CODE	CHEMICAL	CODE	CHEMICAL
A	Methanol	J	n-Heptane
B	Acetone	K	Sodium hydroxide 40%
C	Acetonitrile	L	Sulphuric acid 96%
D	Dichloromethane	M	65% Nitric acid
E	Carbon Disulfide	N	99% Acetic acid
F	Toluene	O	25% Ammonium hydroxide
G	Diethylamine	P	30% Hydrogen peroxide
H	Tetrahydrofuran	S	40% Hydrofluoric acid
I	Ethyl acetate	T	37% Formaldehyde

TYPE OF GLOVES	BREAKTHROUGH TIME
A	≥30 min for at least 6 chemicals
B	≥30 min for at least 3 chemicals
C	≥10 min for at least 1 chemical

EN455-1:	Freedom from holes
EN455-2:	Physical properties
EN455-3:	Biological evaluation
EN455-4:	Shelf Life



**PROTECTION AGAINST MICRO-ORGANISMS EN 374-5**

VIRUS = Glove has passed ISO 16604:2004 (method B)



**FOOD CONTACT DIRECTIVE 2002 / 72 EC**

**EUROPE**

[www.globusgroup.com](http://www.globusgroup.com)

**E:** sales@globus.co.uk  
**T:** +44 (0)161 877 4747  
**F:** +44 (0)161 877 4746

**MIDDLE EAST AND AFRICA**

[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)

**E:** gcc@globusgroup.com  
**T:** +971 4 882 9962  
**F:** +971 4 882 9963

